

# [544] Networking

Tyler Caraza-Harter

# Learning Objectives

- explain how MAC addresses, IP addresses, and port numbers provide addressing, used to facilitate communication between processes on different machines
- select IP addresses correctly for binding and using in a browser to achieve connection in the context of a server running behind a NAT
- identify the port number being used by a process
- select between transport methods (TCP and UDP) based on the functionality needed (on top of IP functionality)

# Outline

## Networks

Internets and "The Internet"

Transport Protocols

# Network Interface Controllers and MAC Addresses




NICs can connect a computer to different physical mediums, such as:

- Ethernet (wired)
- Wi-Fi (wireless)

Every NIC in the world has a unique MAC (media access control) address

- 28 trillion possible addrs
- some devices randomly change their MAC addr for privacy

MAC address:

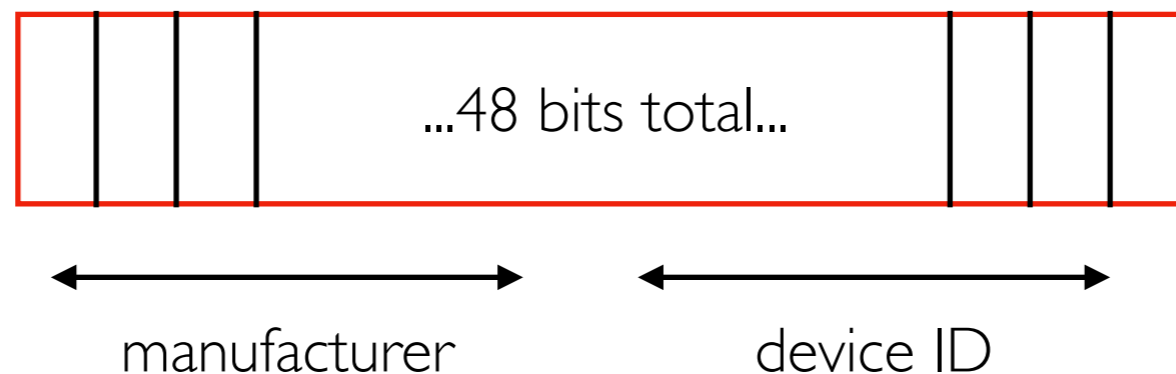

# ip address

```
trh@instance-20240903-151711:~$ ip address
```

```
1: lo: <LOOPBACK,UP,LOWER_UP> mtu 65536 qdisc noqueue state UNKNOWN group
default qlen 1000
    link/loopback 00:00:00:00:00:00 brd 00:00:00:00:00:00
    inet 127.0.0.1/8 scope host lo
        valid_lft forever preferred_lft forever
    inet6 ::1/128 scope host noprefixroute
        valid_lft forever preferred_lft forever
2: ens4: <BROADCAST,MULTICAST,UP,LOWER_UP> mtu 1460 qdisc mq state UP group
default qlen 1000
    link/ether 42:01:0a:80:00:04 brd ff:ff:ff:ff:ff:ff
    altname enp0s4
    inet 10.128.0.4/32 metric 100 scope global dynamic ens4
        valid_lft 1870sec preferred_lft 1870sec
    inet6 fe80::4001:aff:fe80:4/64 scope link
        valid_lft forever preferred_lft forever
```

interface

MAC address

# Virtual Interfaces

```
trh@instance-20240903-151711:~$ ip address
```

```
1: lo: <LOOPBACK,UP,LOWER_UP> mtu 65536 qdisc noqueue state UNKNOWN group
default qlen 1000
    link/loopback 00:00:00:00:00:00 brd 00:00:00:00:00:00
    inet 127.0.0.1/8 scope host lo
        valid_lft forever preferred_lft forever
    inet6 ::1/128 scope host noprefixroute
        valid_lft forever preferred_lft forever
2: ens4: <BROADCAST,MULTICAST,UP,LOWER_UP> mtu 1460 qdisc mq state UP group
default qlen 1000
    link/ether 42:01:0a:80:00:04 brd ff:ff:ff:ff:ff:ff
    altname enp0s4
    inet 10.128.0.4/32 metric 100 scope global dynamic ens4
        valid_lft 1870sec preferred_lft 1870sec
    inet6 fe80::4001:aff:fe80:4/64 scope link
        valid_lft forever preferred_lft forever
```

loopback (lo) device a virtual interface (not actual hardware)  
connecting to a mini network containing just your computer

# Google Console: Adding Interfaces (NICs)

Create Instance > Advanced Options > Networking

## Network interfaces ?

Network interface is permanent

default default (10.128.0.0/20)	▼
other-net subnet (10.0.0.0/24)	▼
<a href="#">ADD NETWORK INTERFACE</a>	

## Virtual Machine Summary

<input type="checkbox"/>	<input checked="" type="checkbox"/>	<a href="#">instance-2</a>	us-central1-a	10.128.0.37 <a href="#">(nic0)</a>	34.29.220.248 <a href="#">(nic0)</a>
				10.0.0.2 <a href="#">(nic1)</a>	35.202.74.234 <a href="#">(nic1)</a>

# Google Console: Adding Interfaces

Create Instance > Advanced Options > Networking

Network interfaces 

```
trh@instance-2:~$ ss address
```

```
ens4: flags=4163<UP,BROADCAST,RUNNING,MULTICAST> mtu 1460
  inet 10.128.0.37 netmask 255.255.255.255 broadcast 0.0.0.0
  inet6 fe80::4001:aff:fe80:25 prefixlen 64 scopeid 0x20<link>
  ether 42:01:0a:80:00:25 txqueuelen 1000 (Ethernet)
  RX packets 637 bytes 546000 (546.0 KB)
  RX errors 0 dropped 0 overruns 0 frame 0
  TX packets 612 bytes 97265 (97.2 KB)
  TX errors 0 dropped 0 overruns 0 carrier 0 collisions 0
```

```
ens5: flags=4163<UP,BROADCAST,RUNNING,MULTICAST> mtu 1460
  inet 10.0.0.2 netmask 255.255.255.255 broadcast 0.0.0.0
  inet6 fe80::4001:aff:fe00:2 prefixlen 64 scopeid 0x20<link>
  ether 42:01:0a:00:00:02 txqueuelen 1000 (Ethernet)
  RX packets 51 bytes 9955 (9.9 KB)
  RX errors 0 dropped 0 overruns 0 frame 0
  TX packets 61 bytes 6834 (6.8 KB)
  TX errors 0 dropped 0 overruns 0 carrier 0 collisions 0
```

```
lo: flags=73<UP,LOOPBACK,RUNNING> mtu 65536
  inet 127.0.0.1 netmask 255.0.0.0
  inet6 ::1 prefixlen 128 scopeid 0x10<host>
  loop txqueuelen 1000 (Local Loopback)
  RX packets 120 bytes 13534 (13.5 KB)
  RX errors 0 dropped 0 overruns 0 frame 0
  TX packets 120 bytes 13534 (13.5 KB)
  TX errors 0 dropped 0 overruns 0 carrier 0 collisions 0
```


7	34.29.220.248 <a href="#">(nic0)</a> 35.202.74.234 <a href="#">(nic1)</a>
---	--



# Networks

A **network** has **nodes** that send bytes to other nodes **by MAC address**


- **nodes**: computer, switch, etc
- direct, or **forwarded by switches**
- whole network uses same physical tech (Wi-Fi, Ethernet, etc)

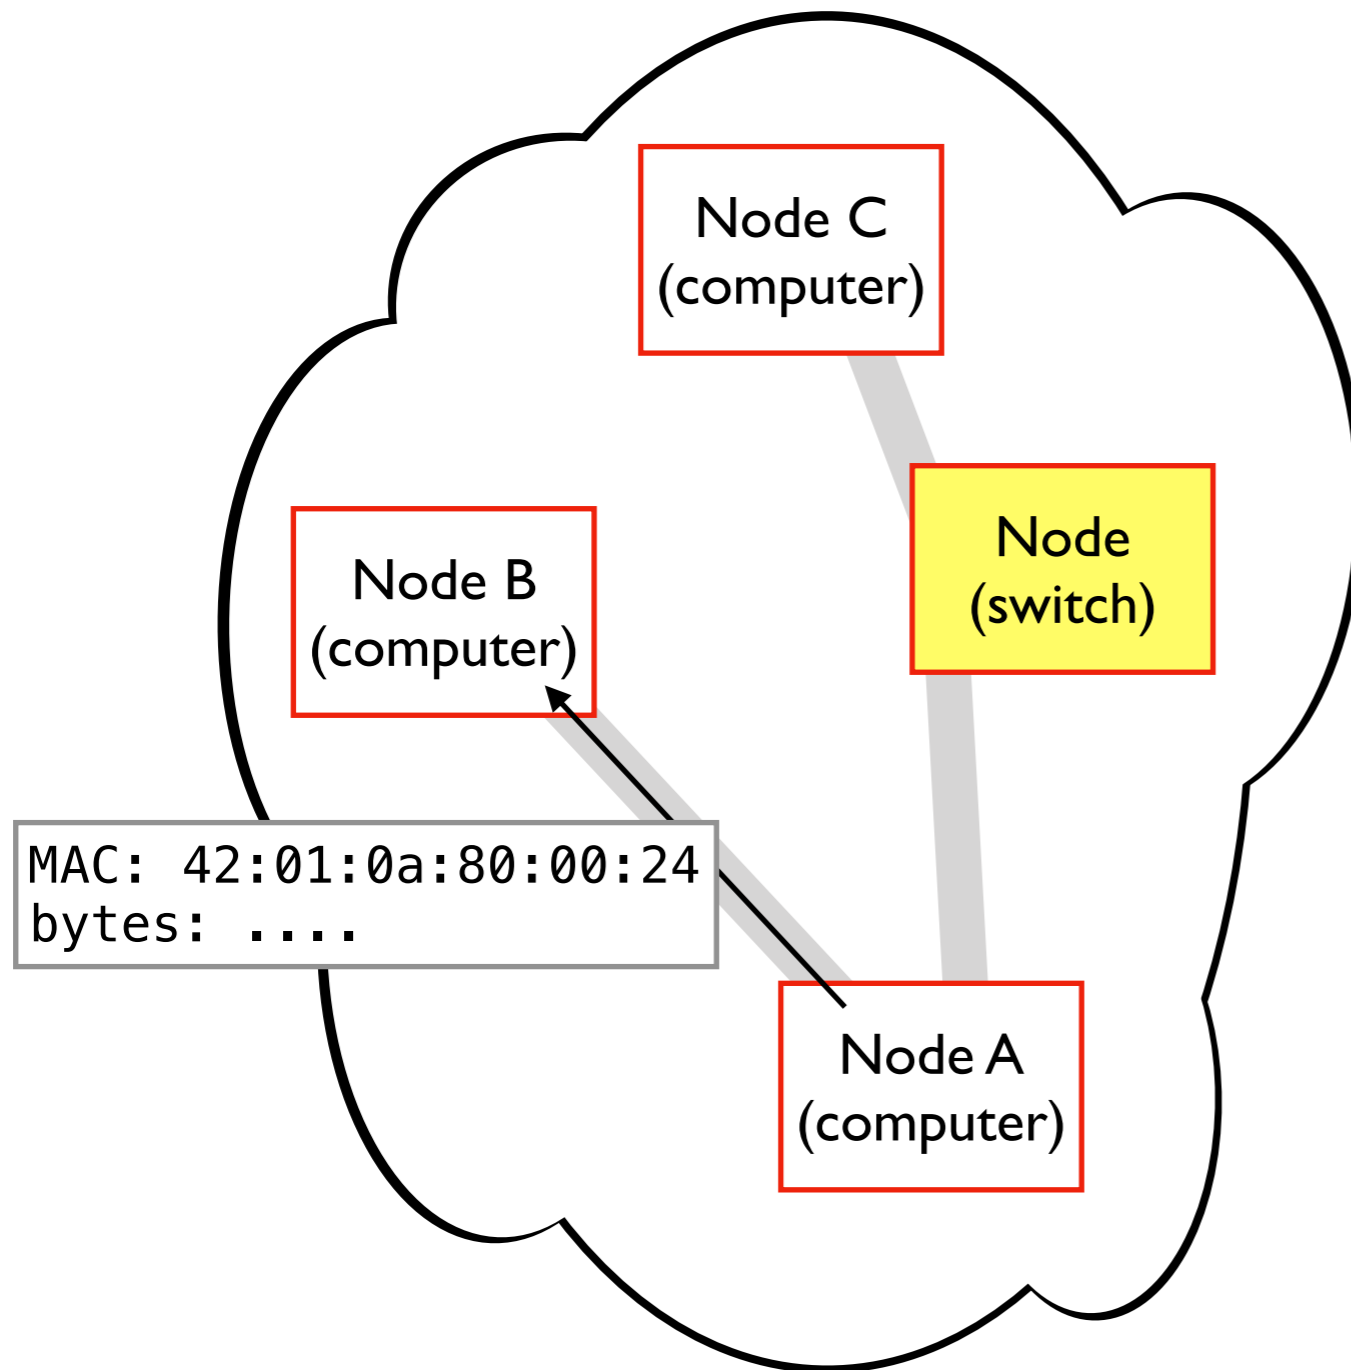

# Networks

Computers can have multiple NICs

- can be on multiple networks (2 ethernets, ethernet+Wi-Fi, etc)
- can't send to a MAC addr in another network without a NIC there

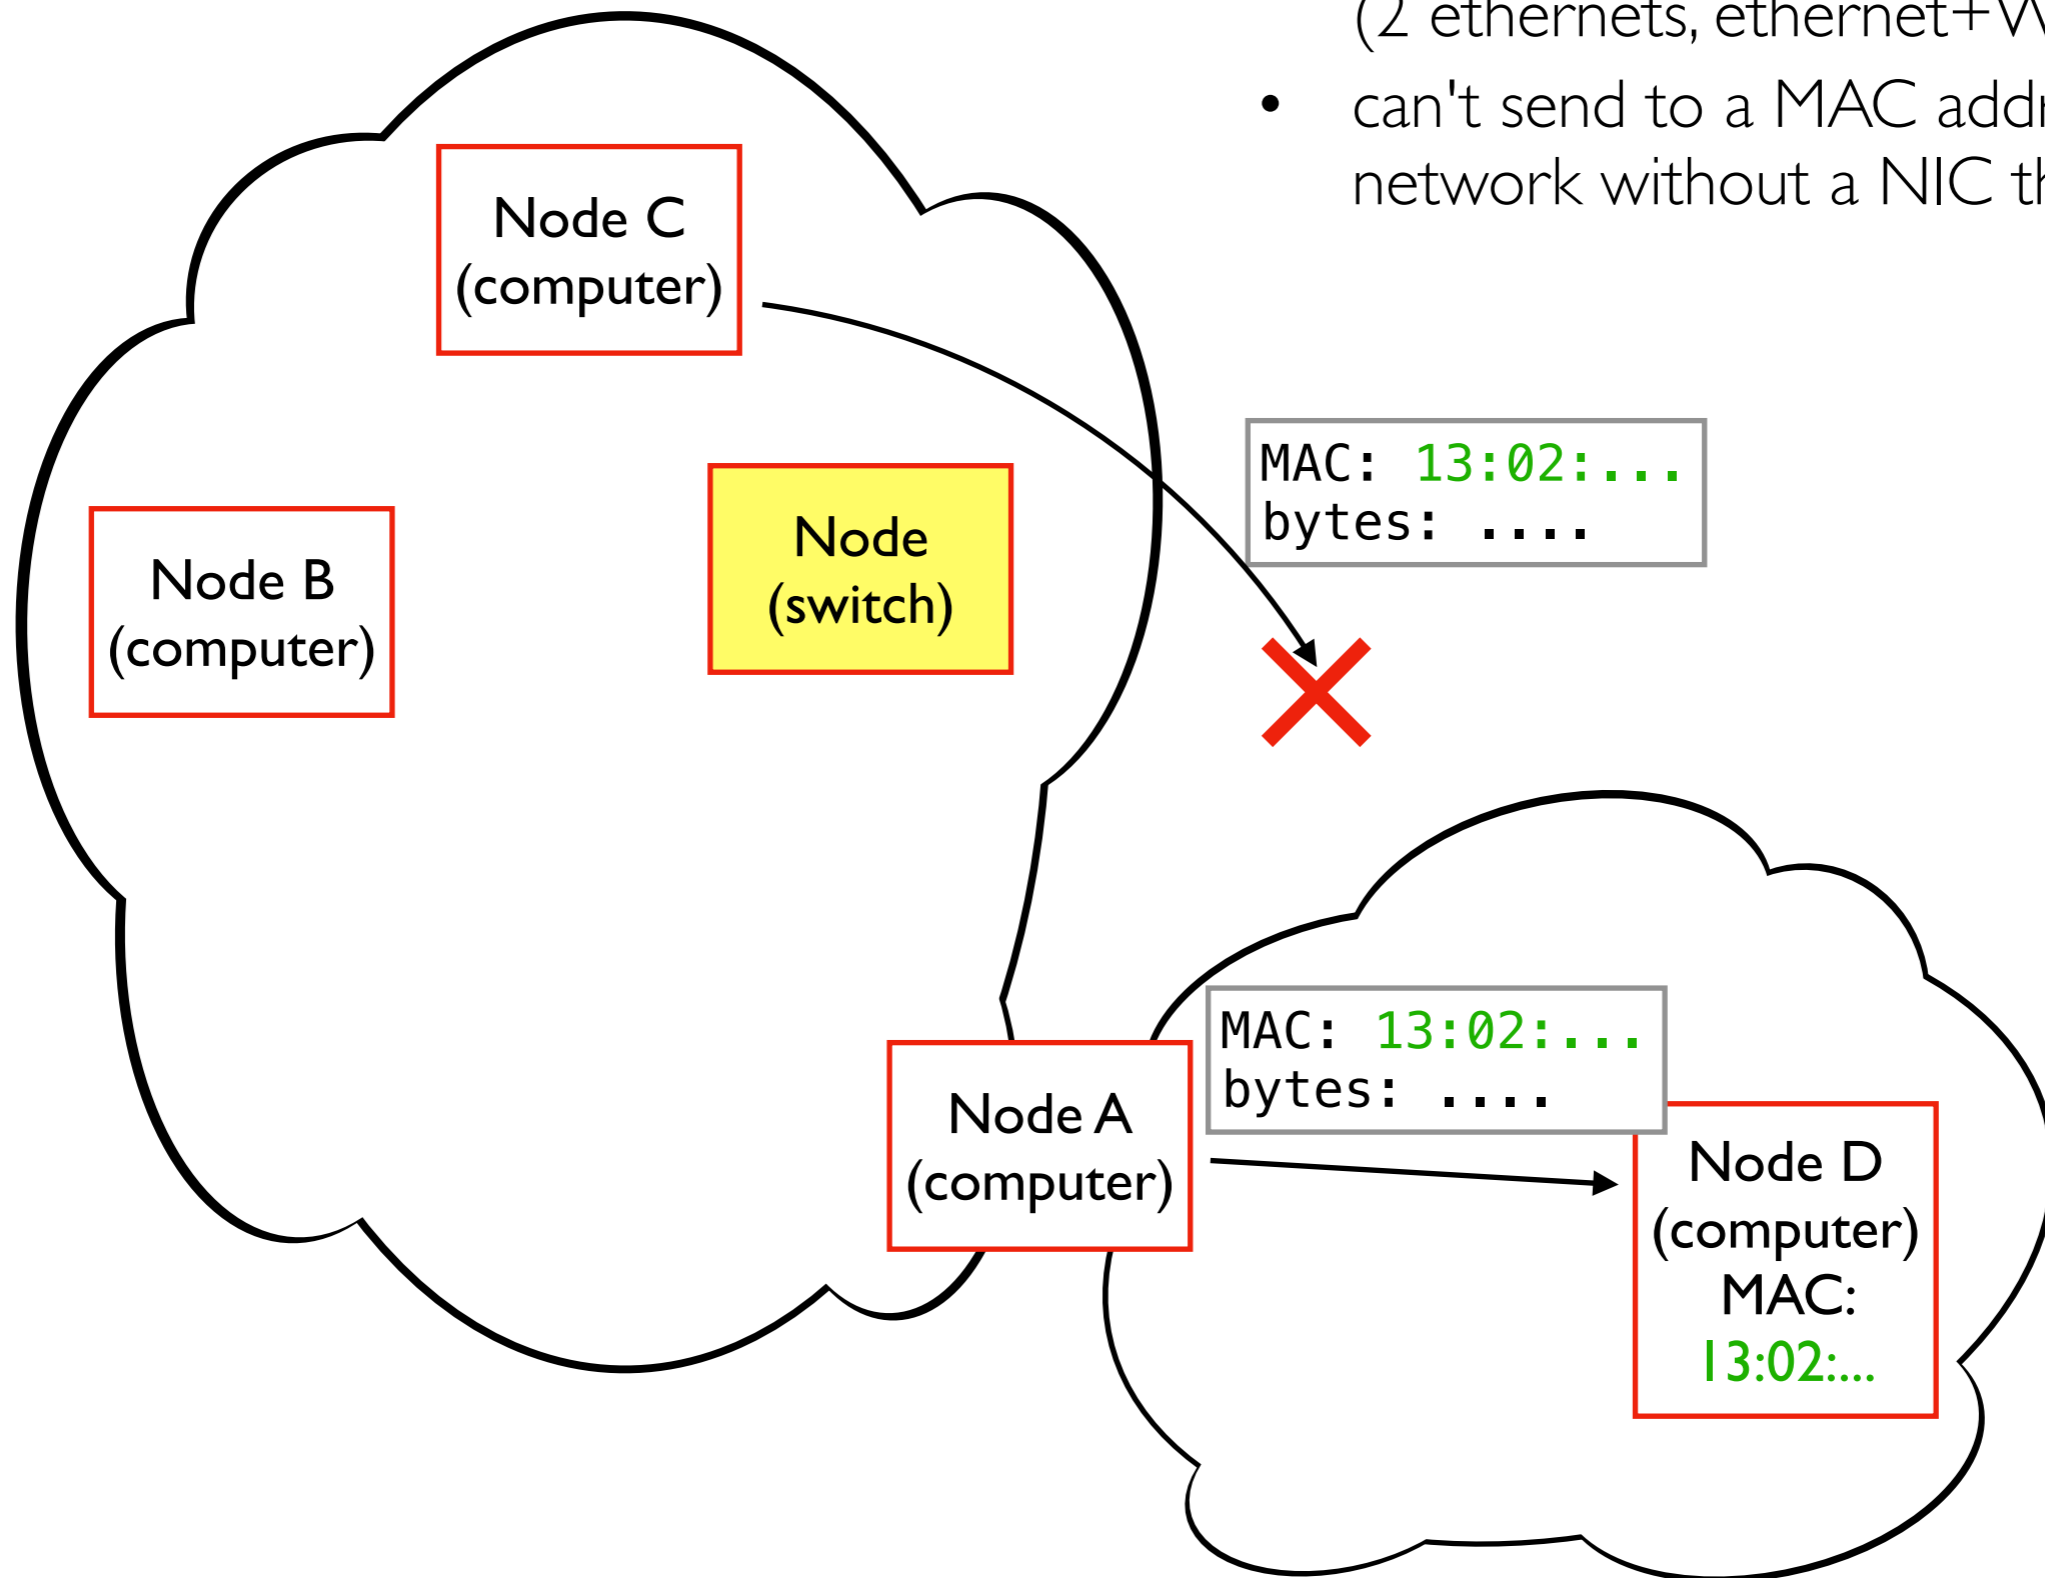


# Outline

Networks

Internets and "The Internet"

Transport Protocols

# Routers

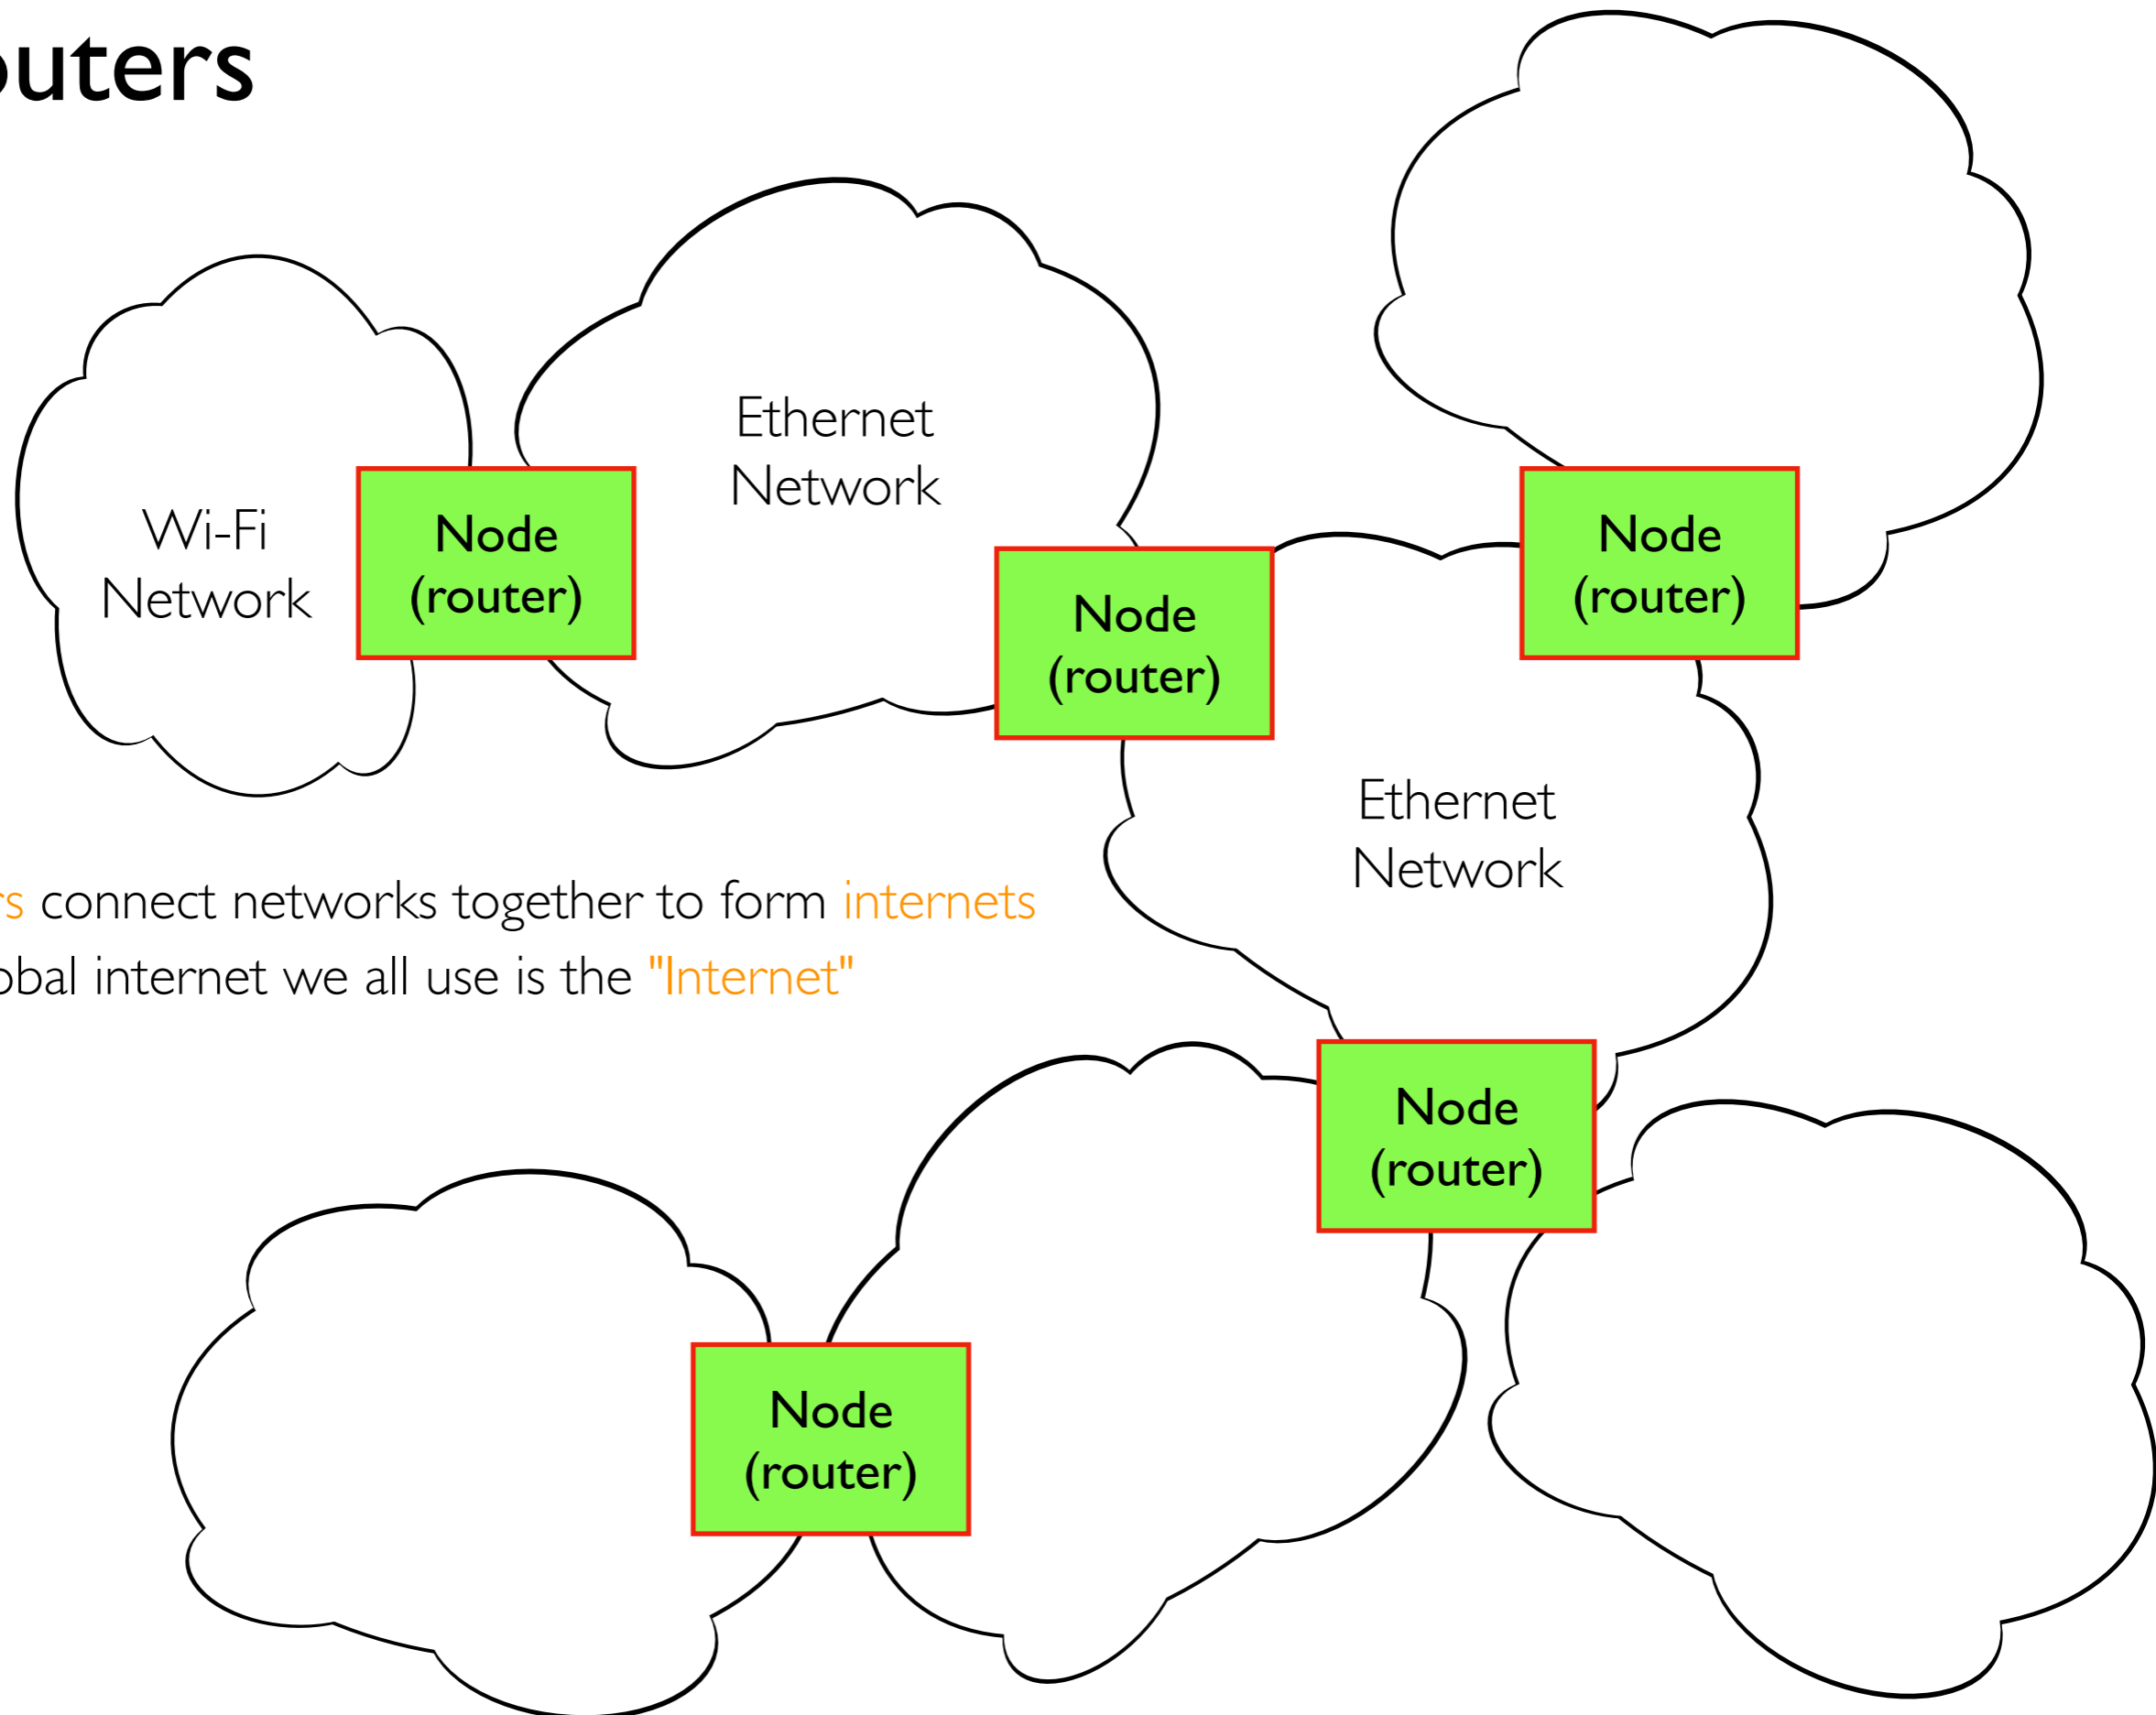


- routers connect networks together to form internets
- the global internet we all use is the "Internet"

# Packet Forwarding

**Packets** (some bytes with an address and other info) can be forwarded along a path from point A to point B



- routers contain **forwarding tables** that help them decide which direction to send along a packet
- those tables would be too big if a router had to know where every MAC address existed in the Internet

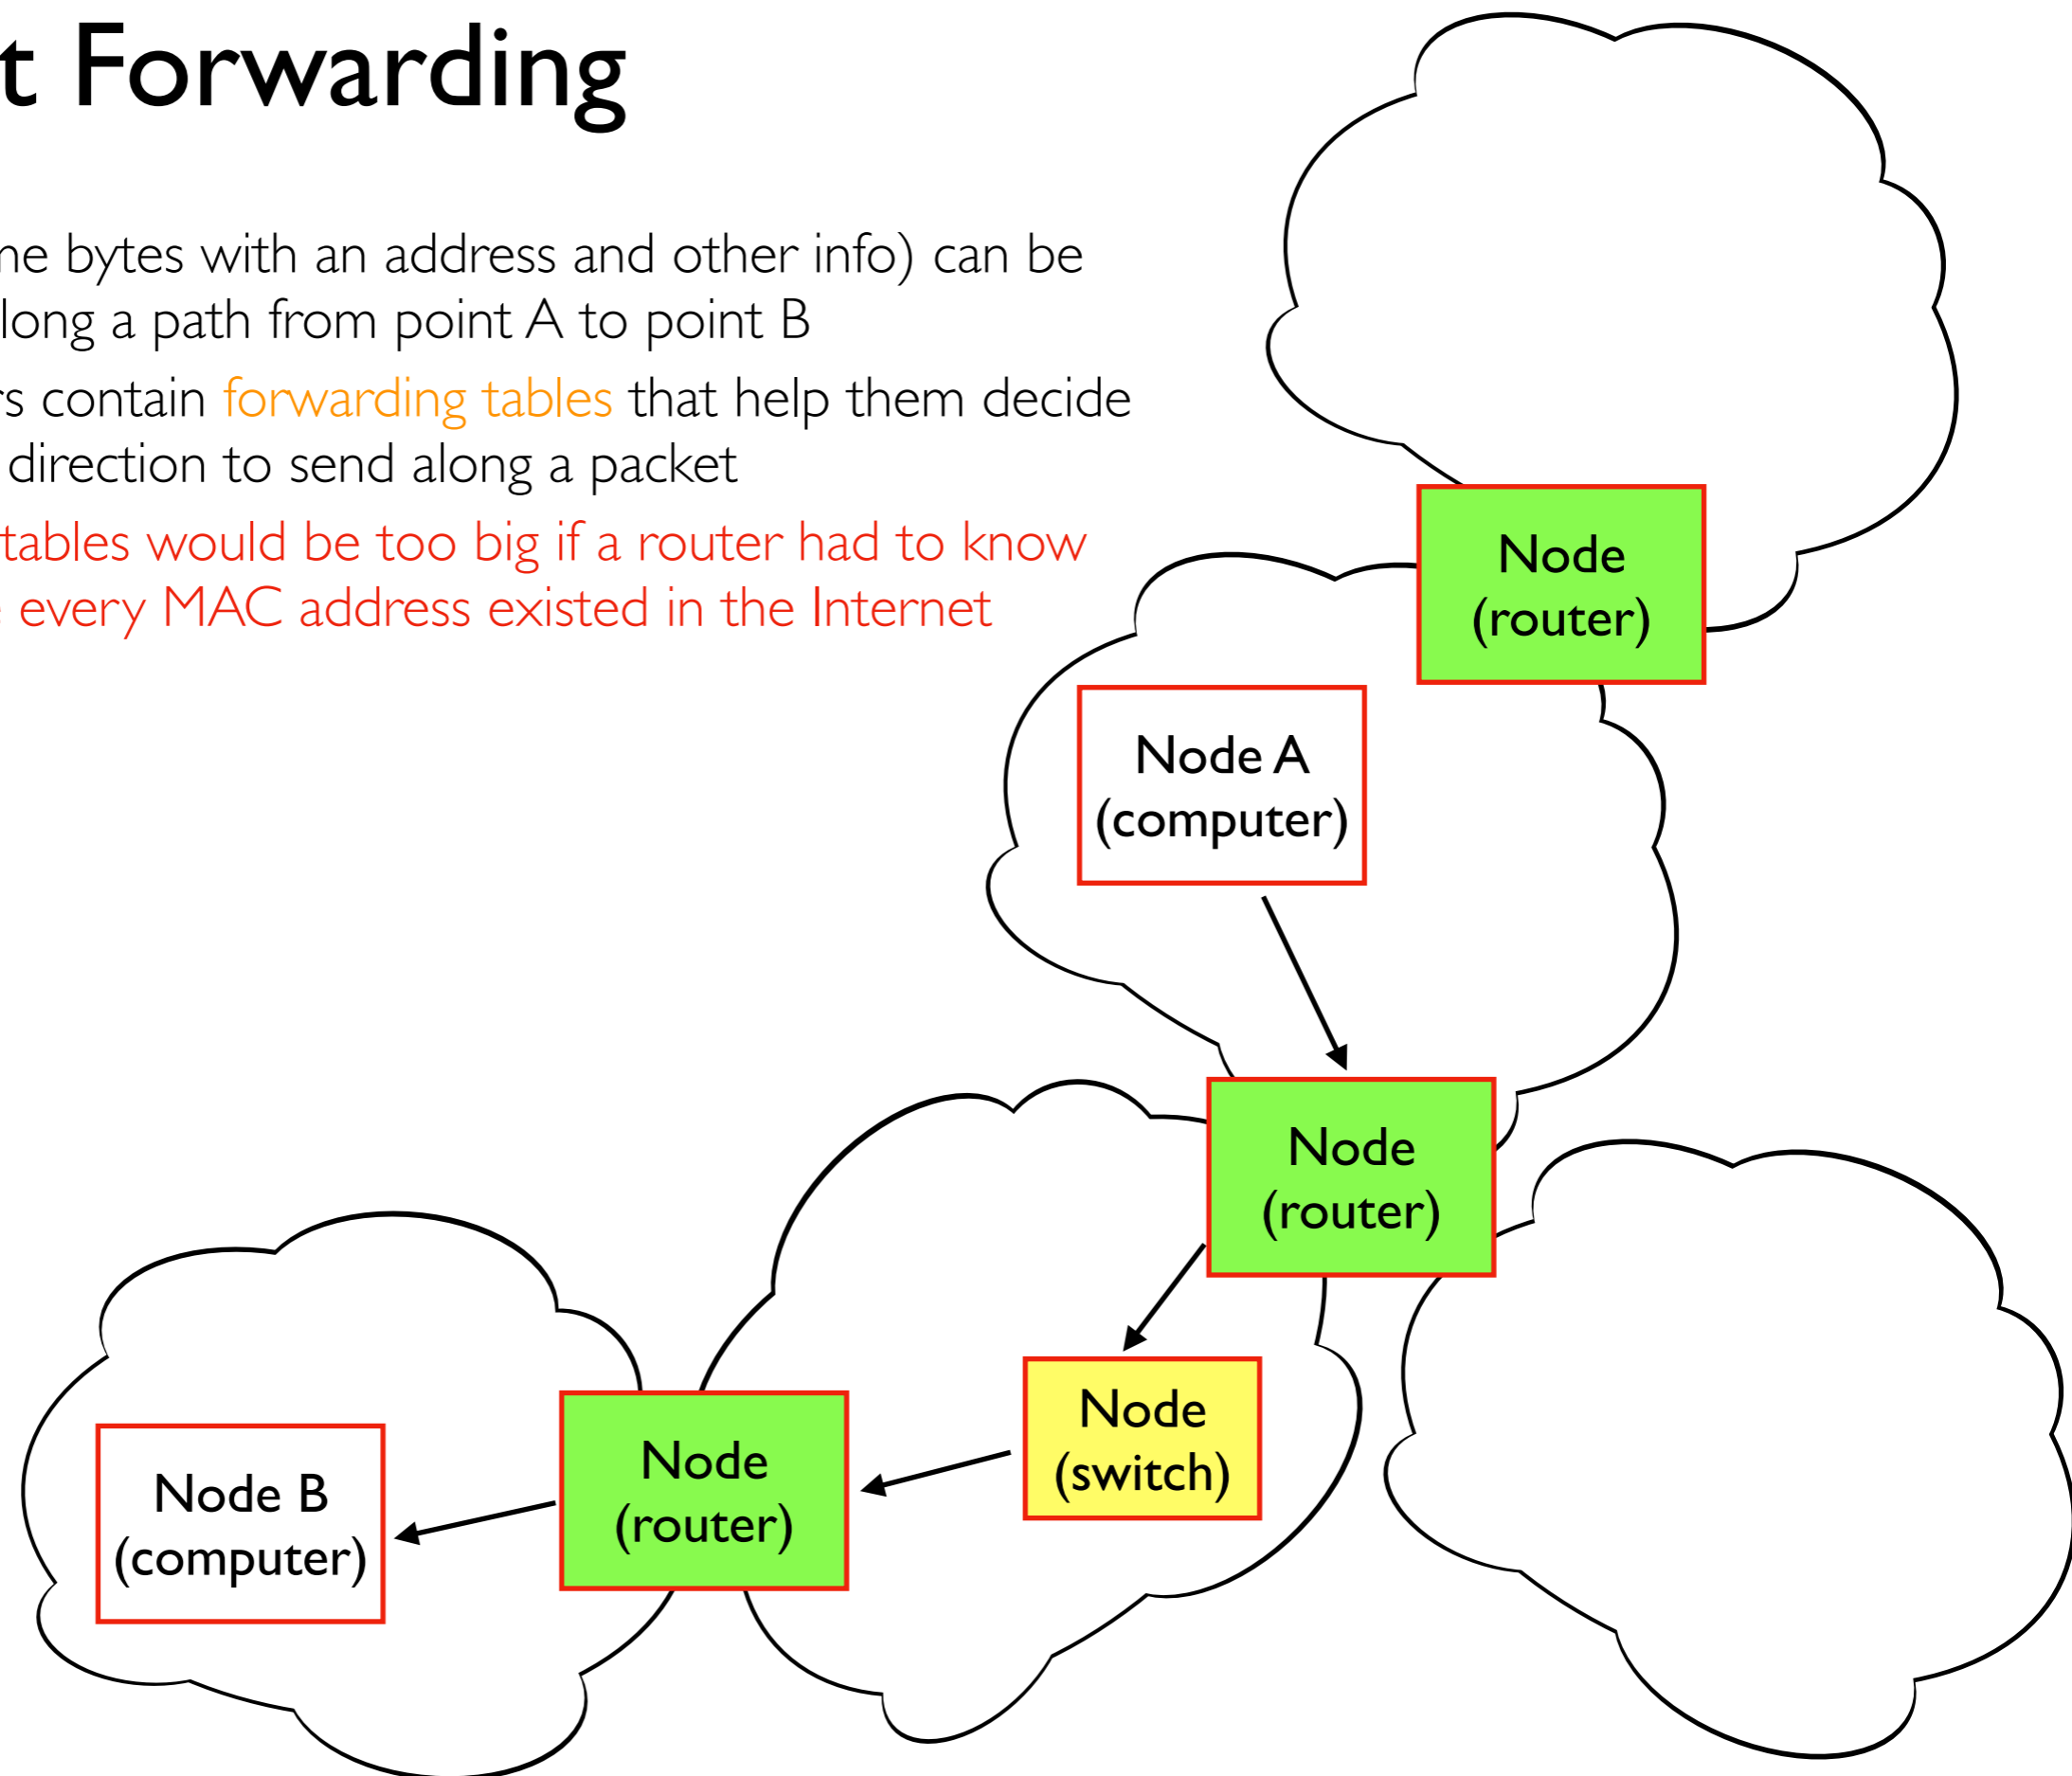

# Internet Protocol

IP addresses are used to send packets across an internet

- example: 34 . 29 . 237 . 29 (domains can map to IP addrs)
- there are about 4 billion possible IP addresses (IPv4)
- IPv6 (less used) are 4x longer
- forwarding tables only need to know which way to send for a given network number

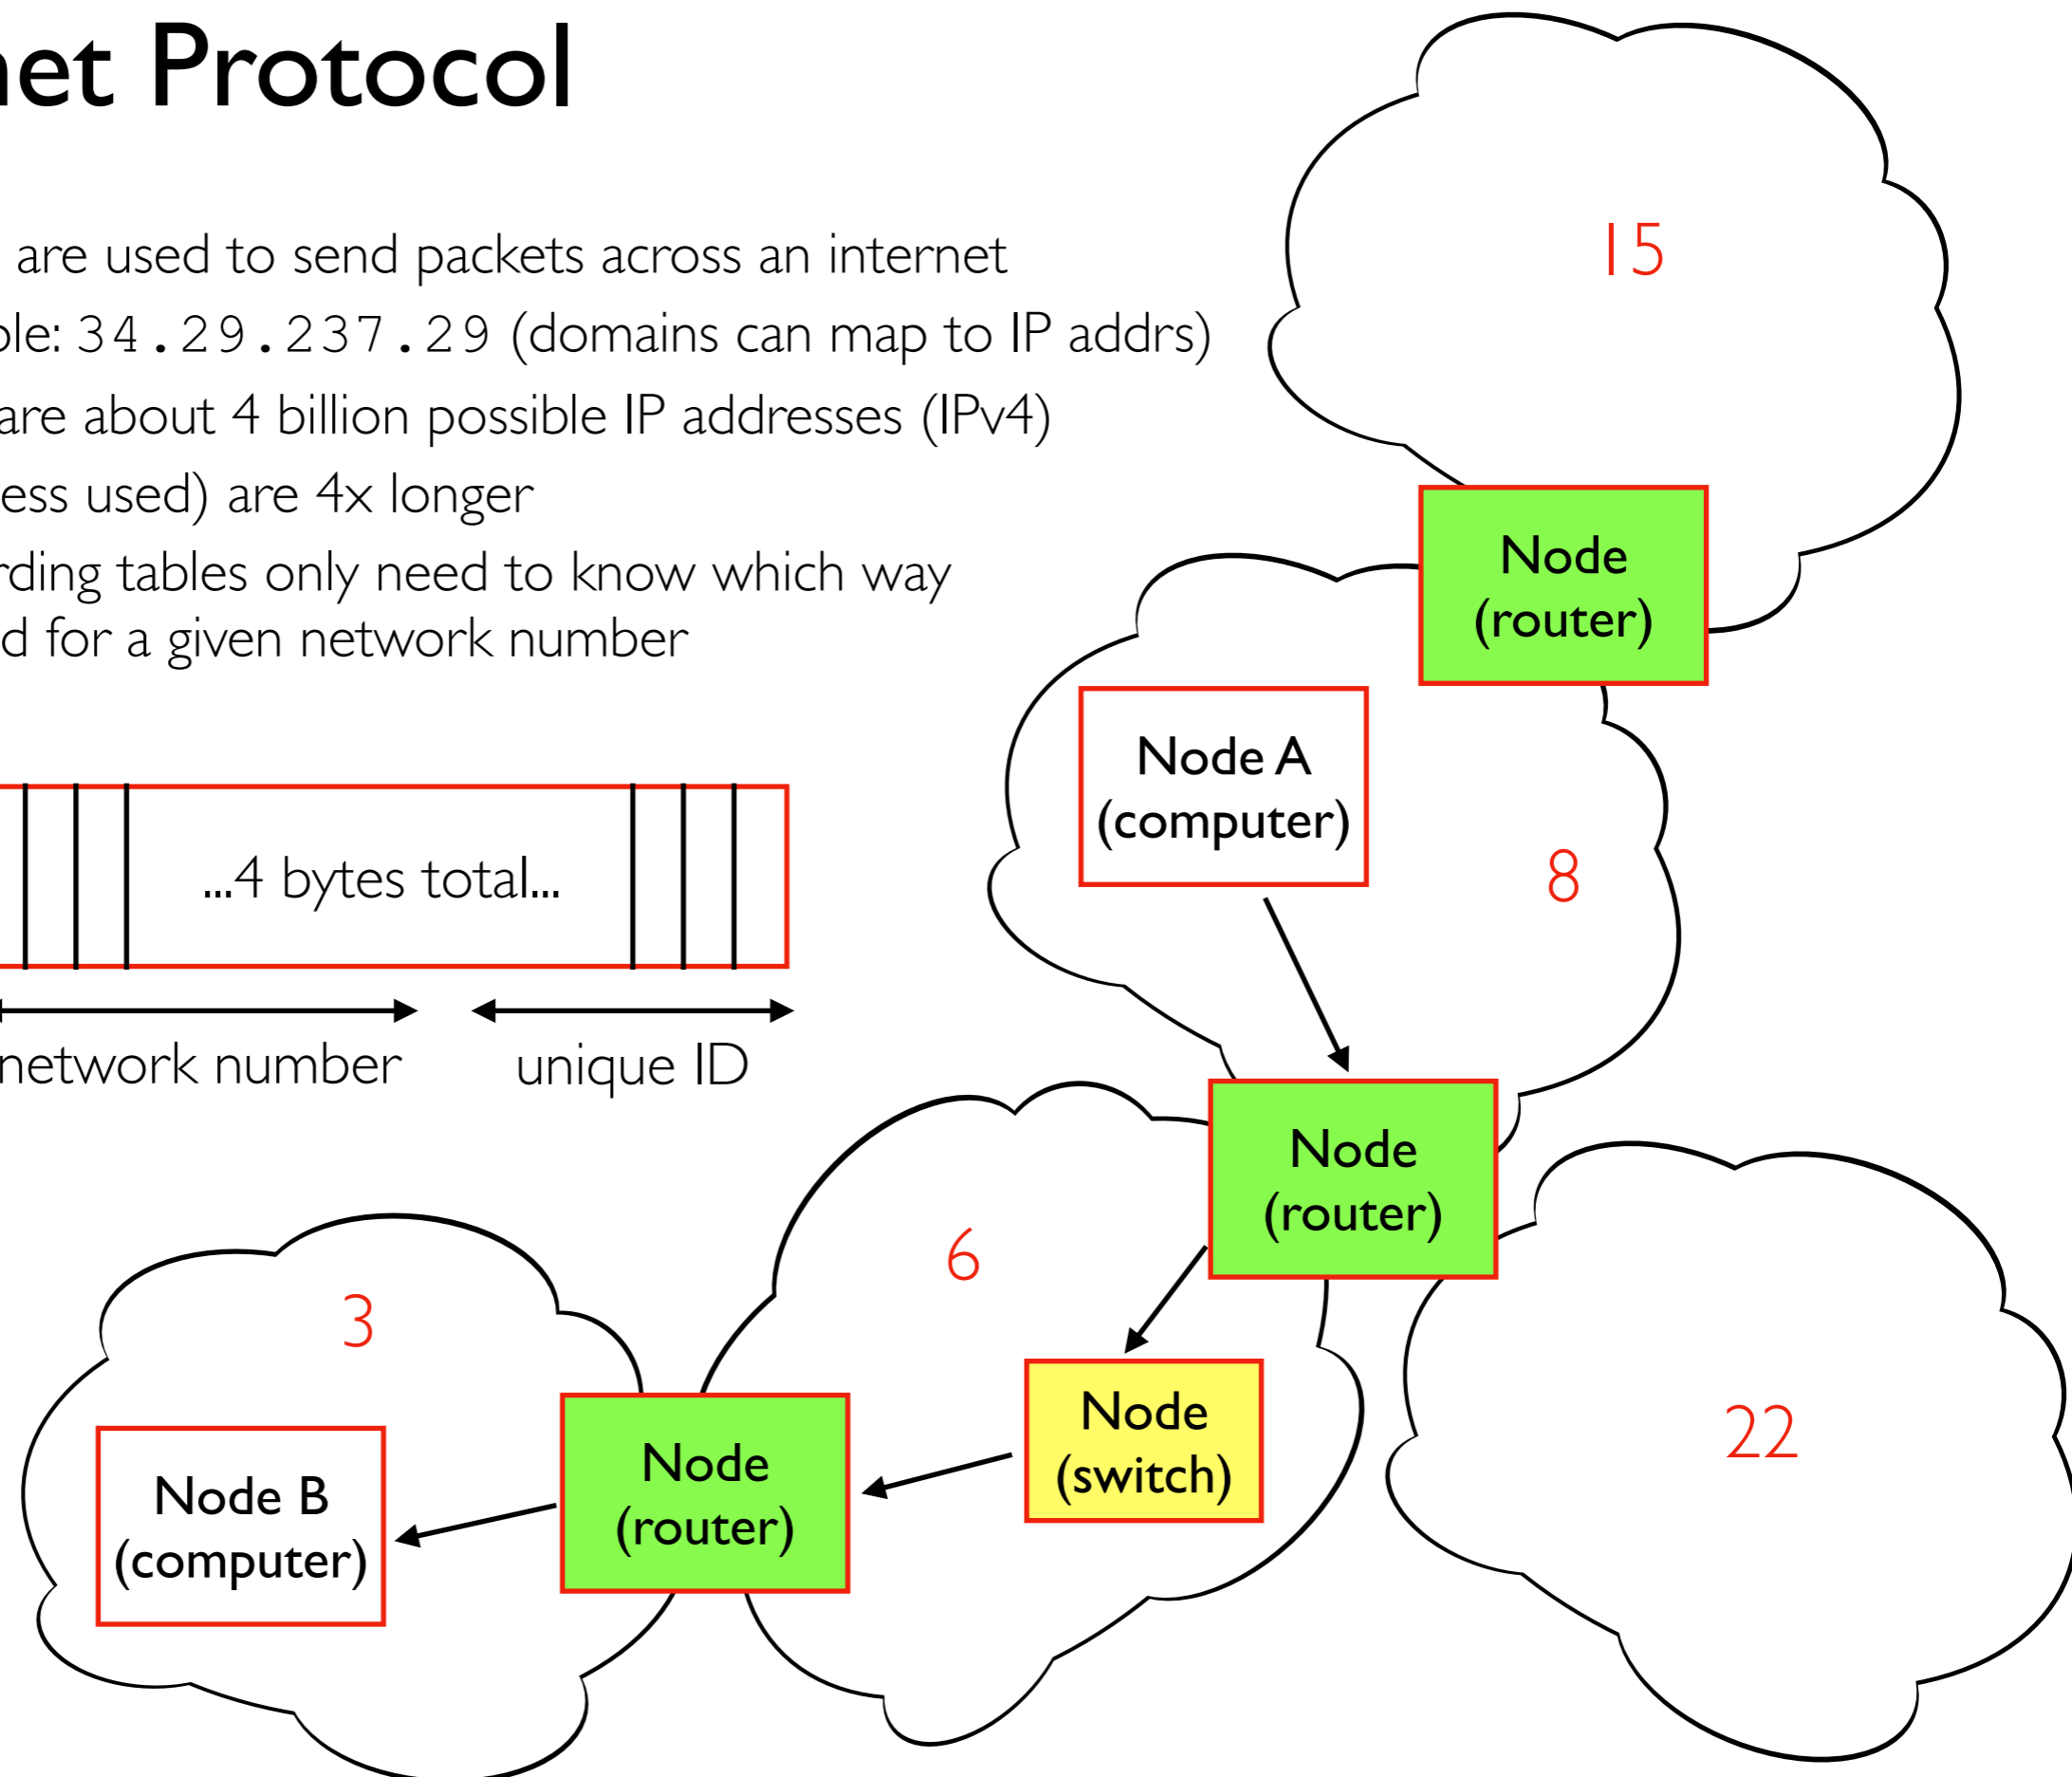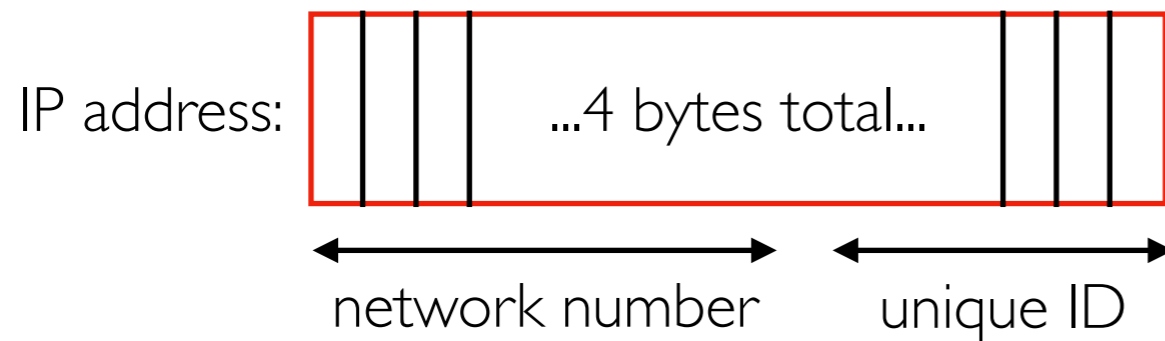

# Listening on an Interface

```
trh@instance-2:~$ ip address
ens4: flags=4163<UP,BROADCAST,RUNNING,MULTICAST> mtu 1460
    inet 10.0.1.2 netmask 255.255.255.255 broadcast 0.0.0.0
    inet6 fe80::200:1:0:0<link>
    ether 42:00:00:00:00:00
    ...
```

```
python3 -m http.server --bind 10.0.1.2
```

```
ens5: flags=4163<UP,BROADCAST,RUNNING,MULTICAST> mtu 1430
    inet 10.0.3.2 netmask 255.255.255.255 broadcast 10.0.3.2
    inet6 fe80::200:3:0:0<link>
    ether 42:00:00:00:00:00
    ...
```

```
python3 -m http.server --bind 10.0.3.2
```

```
lo: flags=73<UP,LOOPBACK,RUNNING> mtu 65536
    inet 127.0.0.1 netmask 255.0.0.0
    inet6 ::1
    loop txqu
    ...
```

```
python3 -m http.server --bind 127.0.0.1
```

```
all of them: python3 -m http.server --bind 0.0.0.0
```

# Private Networks

## Challenges


- we don't have enough IPv4 addresses
- we don't want every machine to be able to receive packets from anywhere

## Private ranges:

- 192.168.0.0 to 192.168.255.255
- 172.16.0.0 to 172.31.255.255
- 10.0.0.0 to 10.255.255.255

these can be divided into "sub networks"  
(subnets) to create different networks in  
a bigger org

Private networks allow duplicates and unreachable machines

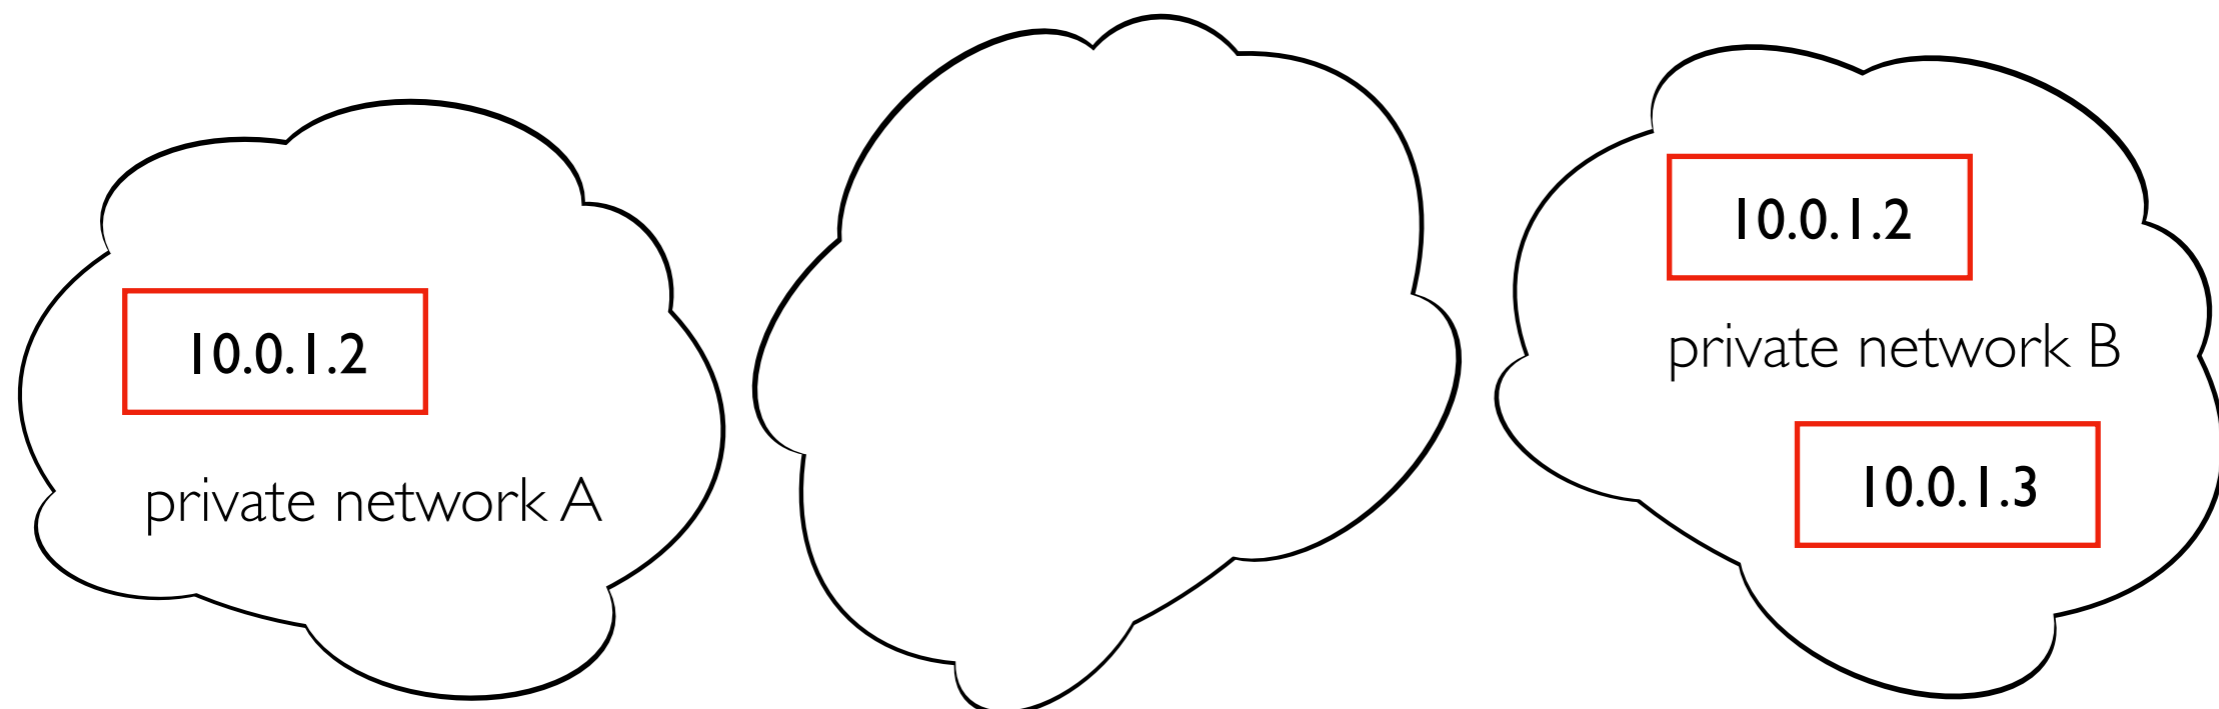



# Private Networks


```
trh@instance-2:~$ ip address
ens4: flags=4163<UP,BROADCAST,RUNNING,MULTICAST> mtu 1460
    inet 10.0.1.2 python3 -m http.server --bind 10.0.1.2
    inet6 fe80::40
    ether 42:01:0a:00:01:02 txqueuelen 1000 (Ethernet)
    ...
```

Private ranges:

- 192.168.0.0 to 192.168.255.255
- 172.16.0.0 to 172.31.255.255
- 10.0.0.0 to 10.255.255.255

`http://10.0.1.2:...`  
won't work in web browser!


Private networks allow duplicates and unreachable machines

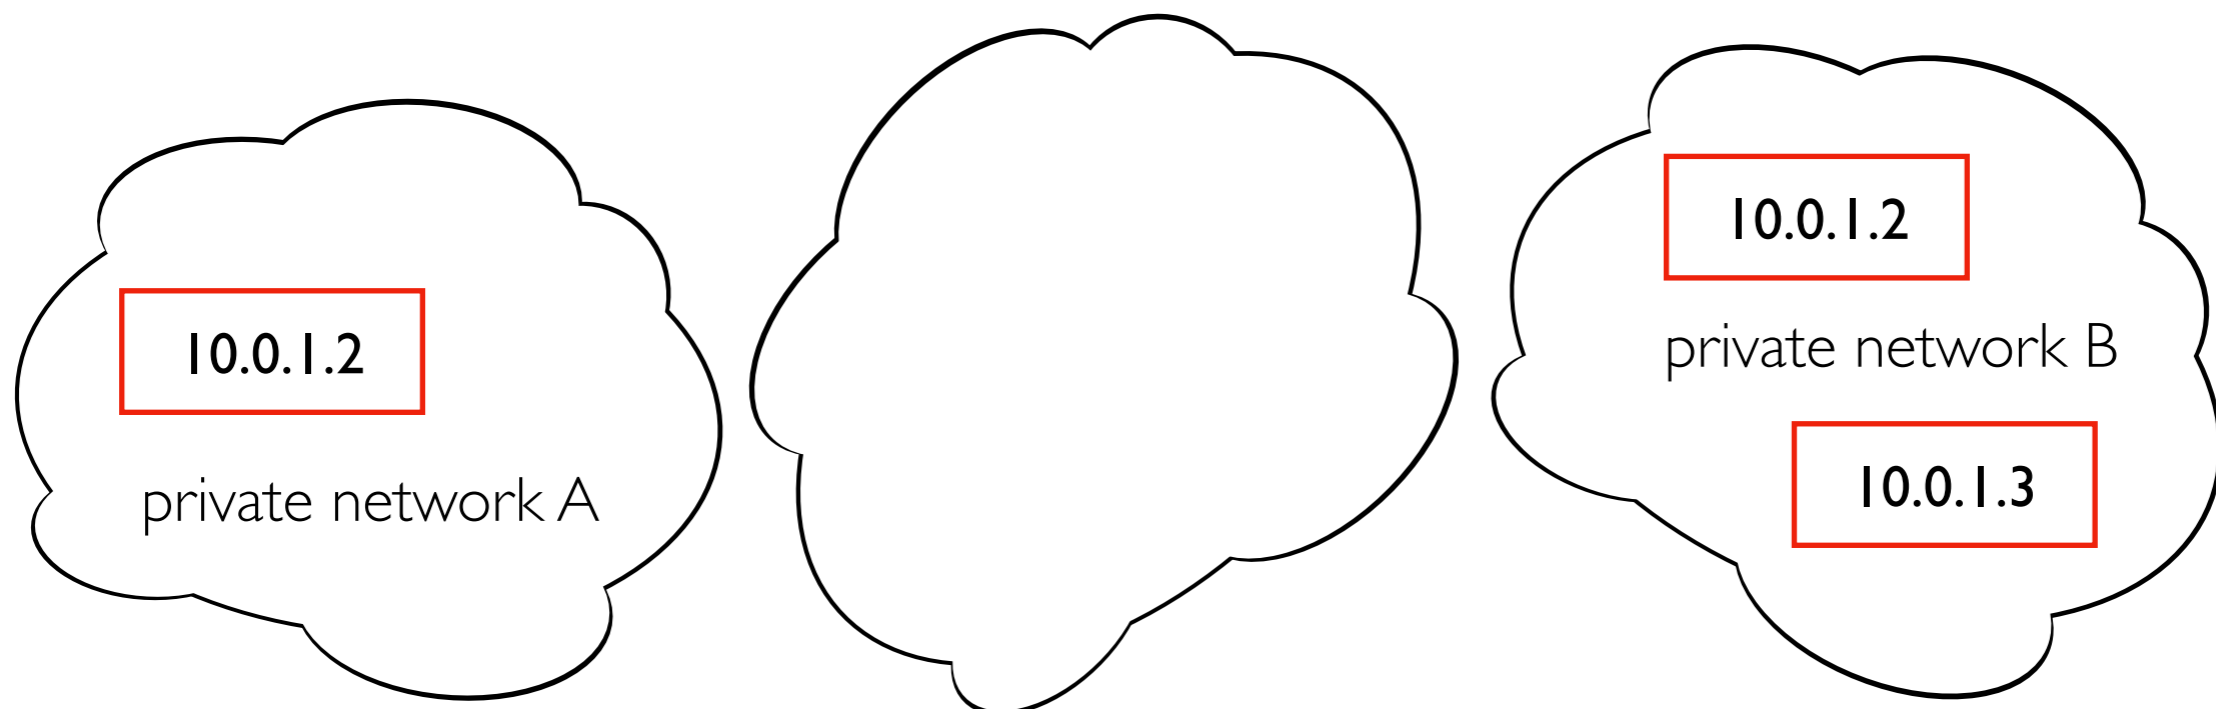

# Network Address Translation

Google Console (view NAT config)


<input type="checkbox"/>	Status	Name ↑	Internal IP	External IP
<input type="checkbox"/>	✓	<a href="#">instance-1</a>	10.128.0.36 ( <a href="#">nic0</a> )	34.29.237.29 ( <a href="#">nic0</a> )
<input type="checkbox"/>	✓	<a href="#">instance-2</a>	10.0.1.2 ( <a href="#">nic0</a> ) 10.0.3.2 ( <a href="#">nic1</a> )	35.202.74.234 ( <a href="#">nic0</a> ) 34.29.220.248 ( <a href="#">nic1</a> )

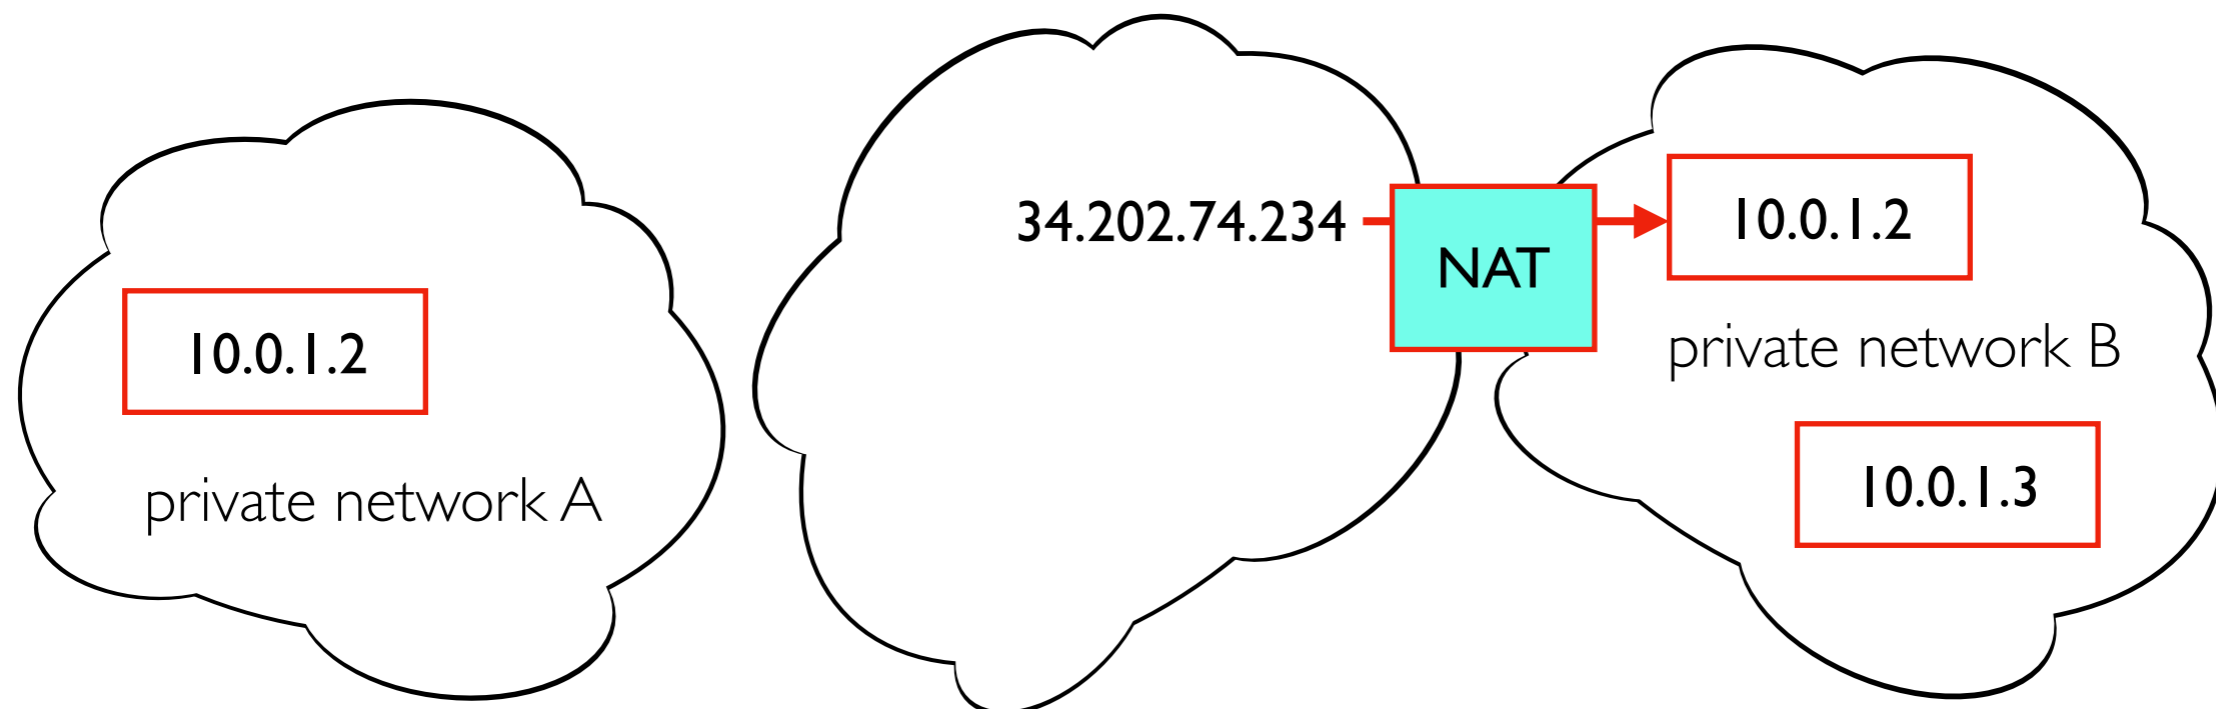

# Network Address Translation

Google Console (view NAT config)

<input type="checkbox"/>	Status	Name ↑	Internal IP	External IP
<input type="checkbox"/>	✓	<a href="#">instance-1</a>	10.128.0.36 ( <a href="#">nic0</a> )	34.29.237.29 ( <a href="#">nic0</a> )
<input type="checkbox"/>	✓	<a href="#">instance-2</a>	10.0.1.2 ( <a href="#">nic0</a> ) 10.0.3.2 ( <a href="#">nic1</a> )	35.202.74.234 ( <a href="#">nic0</a> ) 34.29.220.248 ( <a href="#">nic1</a> )

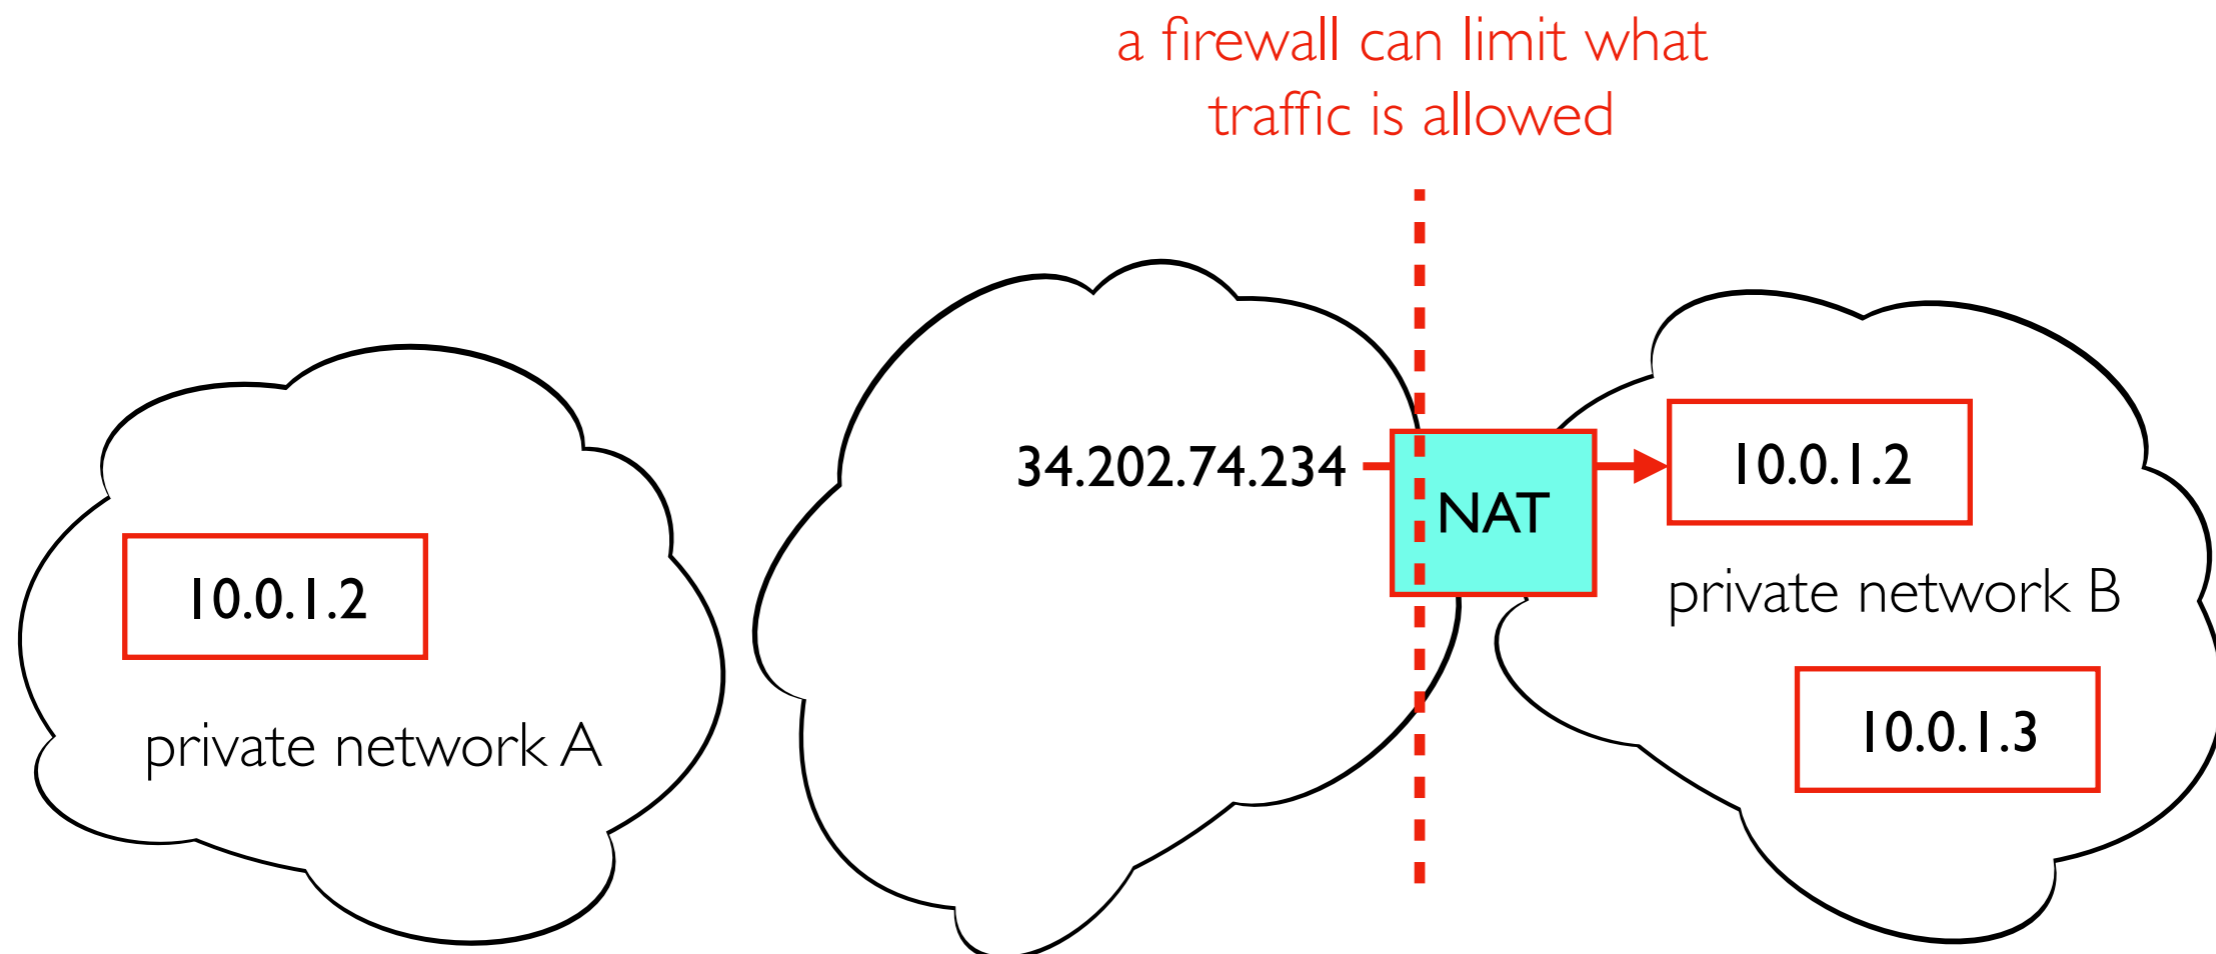


# Network Address Translation

Google Console (view NAT config)

<input type="checkbox"/>	Status	Name ↑	Internal IP	External IP
<input type="checkbox"/>	✓	<a href="#">instance-1</a>	10.128.0.36 ( <a href="#">nic0</a> )	34.29.237.29 ( <a href="#">nic0</a> )
<input type="checkbox"/>	✓	<a href="#">instance-2</a>	10.0.1.2 ( <a href="#">nic0</a> ) 10.0.3.2 ( <a href="#">nic1</a> )	35.202.74.234 ( <a href="#">nic0</a> ) 34.29.220.248 ( <a href="#">nic1</a> )

By default, the external IPs are "ephemeral" (change upon reboot). You can rent "static" IPs that don't change.

Browser

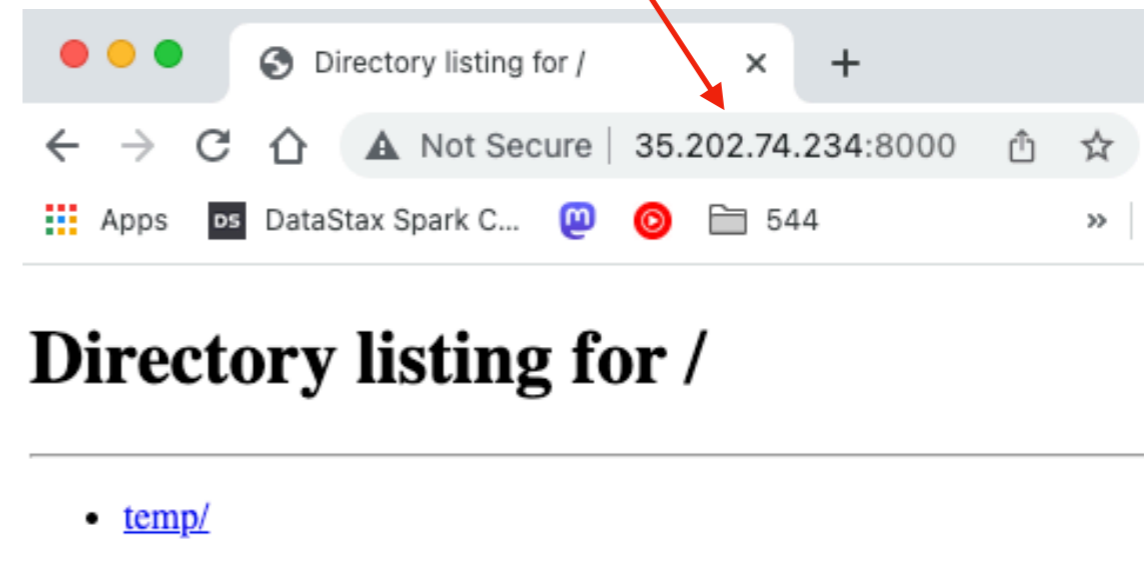

Server

```
trh@instance-2:~/temp$ python3 -m http.server --bind 10.0.1.2
Serving HTTP on 10.0.1.2 port 8000 (http://10.0.1.2:8000/) ...
72.33.0.184 - - [10/Feb/2023 21:12:53] "GET / HTTP/1.1" 200 -
...
```

# Outline

Networks

Internets and "The Internet"

Transport Protocols


# Port Numbers

Computers might be running multiple processes using the network

- IP address => which NIC?
- Port number => which process?

```
trh@instance-2:~$ python3 -m http.server --directory=A --bind 10.0.1.2 8000 &  
[1] 13502  
Serving HTTP on 10.0.1.2 port 8000 (http://10.0.1.2:8000/) ...
```

```
trh@instance-2:~$ python3 -m http.server --directory=B --bind 10.0.1.2 9000 &  
[2] 13503  
Serving HTTP on 10.0.1.2 port 9000 (http://10.0.1.2:9000/) ...
```

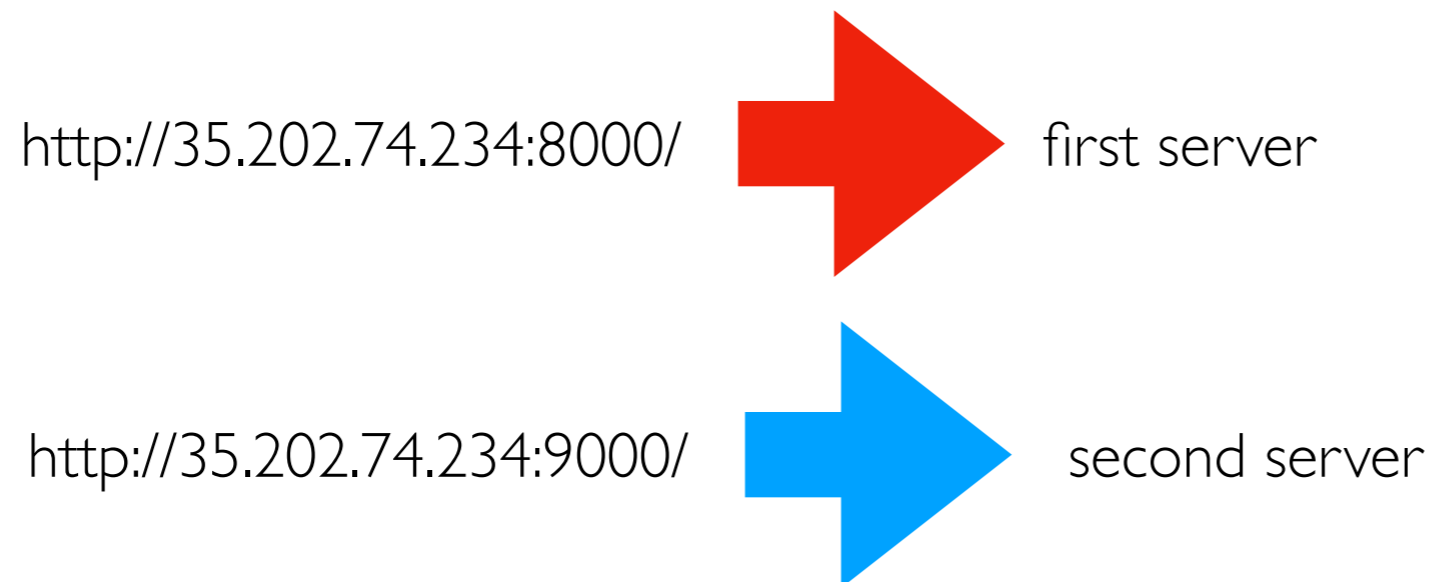

# TopHat

42:01:0a:80:00:25 is an example of what?

# Transport Protocols

Most common

- **UDP** (User Datagram Protocol)
- **TCP** (Transmission Control Protocol)

BOTH build on IP networking and BOTH provide **port numbers**

-t: tcp, -u: udp



```
trh@instance-2:~/temp$ sudo ss -t lpn
```

State	Local Address:Port	Peer Address:Port	Process
LISTEN	10.128.0.4:8000	0.0.0.0:*	users:(("python3",...))
LISTEN	10.128.0.4:9000	0.0.0.0:*	users:(("python3",...))
LISTEN	*:22	*:*	



# Reliability: UDP vs. TCP


Packets may be

- dropped
- reordered
- split

TCP saves+reassembles **packets** in order to provide original **message** (when possible).  
For packet drops, it retries. We'll mostly use TCP.

UDP doesn't do this extra work. Why ever use UDP?

# Network Stack: Common Implementations

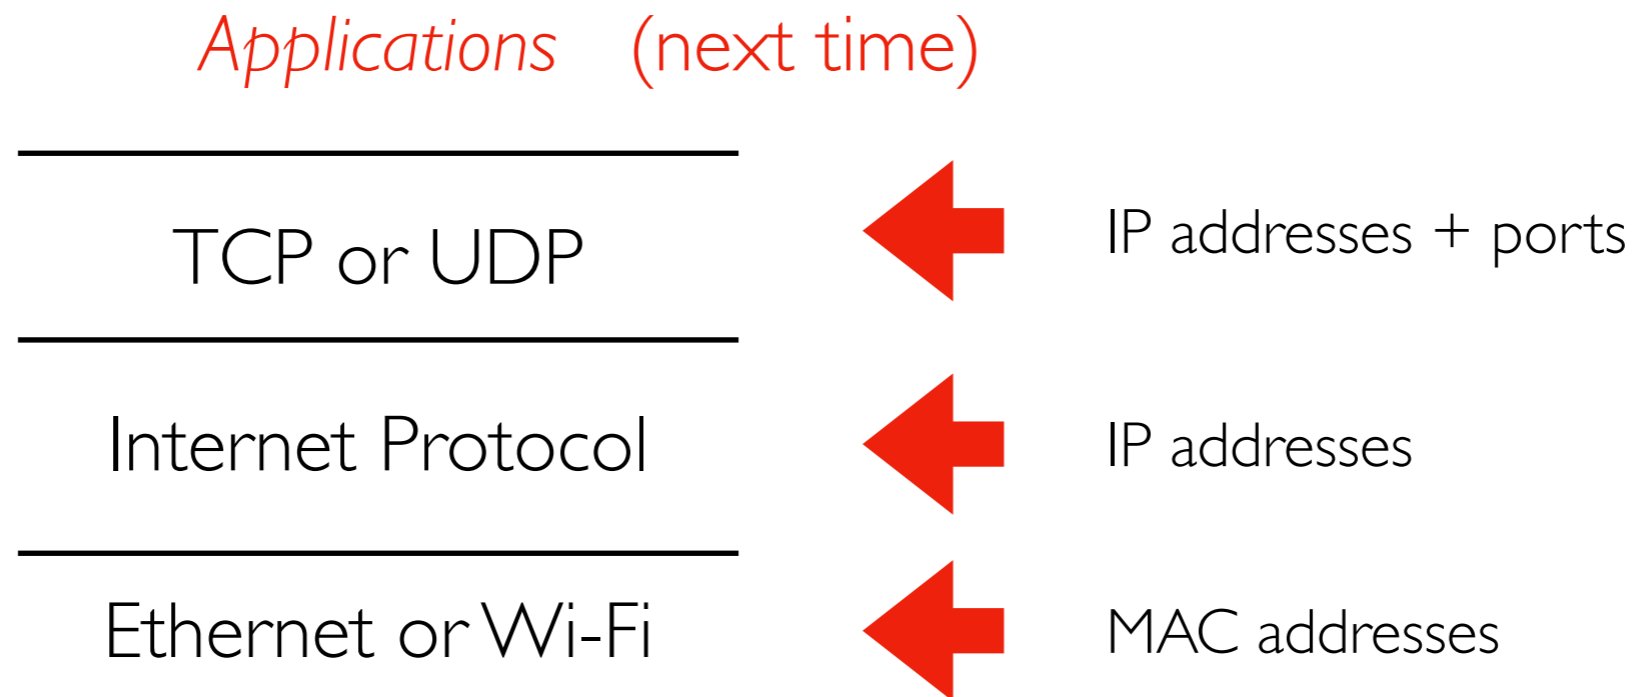

Network applications (like most complex systems) are not built as one single system. Layers are built upon other layers to provide additional functionality.